


EXMOOR TRIM LTD Inward Facing Fold Up

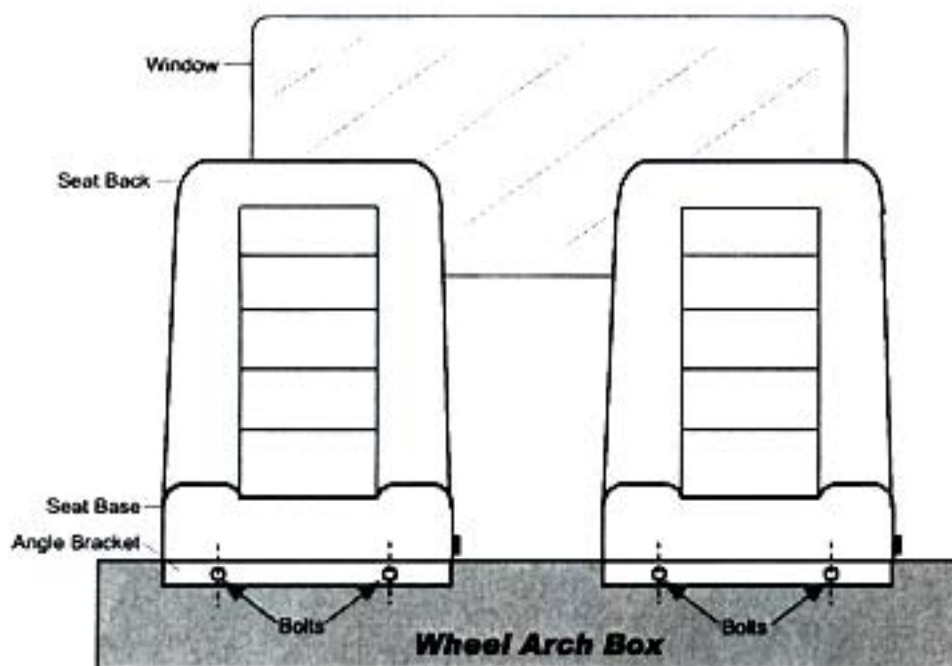

The Inward Facing Fold Up is fixed in to position with two bolts on the vertical face of the wheel arch box and two bolts at the back of the seat.

Position the seats along the wheel arch box, being sure not to foul the front bulkhead or the rear end of the body.

Check that there are no wires, pipes or strengtheners behind the seat box in the area that you will need to drill.

With the seat in position, use the fixing holes as a template to mark the wheel arch box.

Now remove the seat, drill the four required holes and then fix the seat into position. The supplied spreader plates should be treated like big washers and located on the underside of the wheel arch box.

