




T H E S P E C I A L I S T S I N L A N D R O V E R S • U S A

V-8 Starter Motor Installation Instructions

- 1) Place the vehicle on a suitable hoist.
- 2) Disconnect the battery negative lead.
- 3) Disconnect the leads from the solenoid and starter motor and remove the exhaust heat-shield.
- 4) Remove the two bolts securing the starter motor to the flywheel housing.
- 5) Remove the starter motor from underneath the vehicle.

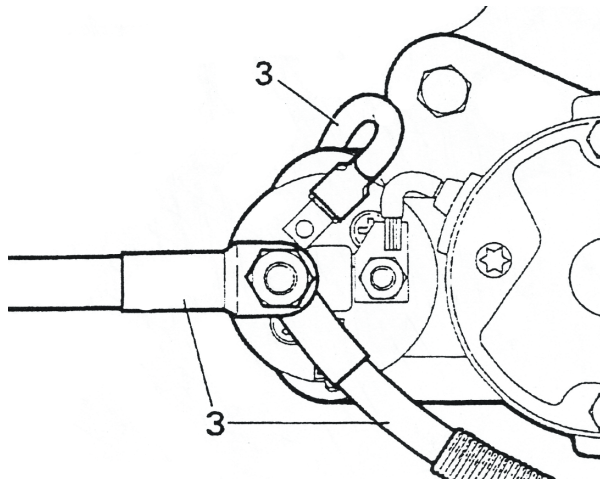

- 6) Refit a starter motor by reversing the above procedure

1 802 879-0032 or (800) 403-7591 • Fax: (802) 879-9152
email@roversnorth.com • www.roversnorth.com

Rovers North, Inc. • 1319 VT Rt. 128 • Westford, Vermont • 05494-9601 USA



T H E S P E C I A L I S T S I N L A N D R O V E R S • U S A

Instructions Questionnaire

We rely on our customers to help us continually improve our instruction sheets. Please FAX or mail any comments, questions, or ideas for improvements you may have.

Send To: Rovers North

1319 Vermont Route 128

Westford, VT 05494

or Fax: 802-879-9152

Your Name: _____

Phone #: _____

Address: _____

Email Adrs: _____

Instruction part number (top right corner) or description of what instructions are: _____

Overall, how would you rate the quality of this set of instructions? (please circle one):

Poor		Fair		Good		Very Good		Excellent	
1	2	3	4	5	6	7	8	9	10

Ideas, Comments, or Corrections (please include specifics, such as page number, or step number):

THANK YOU!

1 802 879-0032 or (800) 403-7591 • Fax: (802) 879-9152
email@roversnorth.com • www.roversnorth.com

Rovers North, Inc. • 1319 VT Rt. 128 • Westford, Vermont • 05494-9601 USA