





T H E S P E C I A L I S T S I N L A N D R O V E R S • U S A

Fuel Cradle Mounting Taps For NAS Defender 90

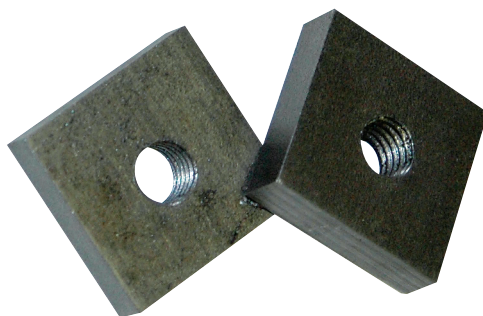

To allow for welding variations in alignment tolerances, the mounting taps for the NAS fuel tank cradle are best installed after the rear frame member has been completely welded in.

- 1) Before installing the fuel tank, locate the fuel cradle into place using the forward chassis mounting bolts. Mark the location of the 2 rear mounting holes onto the bottom of the rear cross member.
- 2) Remove the cradle.
- 3) Drill a 12mm hole through the marked areas.
- 4) Align the mounting taps so the securing bolt will pass through the hole and weld into place.

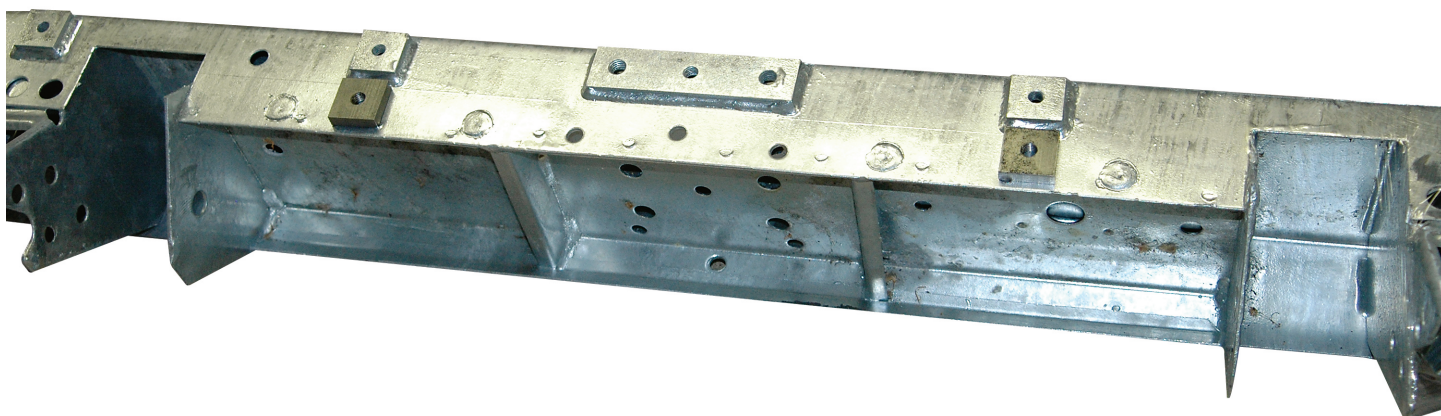

1 802 879-0032 or 1-800-403-7591 • Fax: (802) 879-9152
email@roversnorth.com • www.roversnorth.com

Rovers North, Inc. • 1319 Vermont Route 128 • Westford, Vermont • 05494-9601 USA



T H E S P E C I A L I S T S I N L A N D R O V E R S • U S A

Instructions Questionnaire

We rely on our customers to help us continually improve our instruction sheets. Please FAX or mail any comments, questions, or ideas for improvements you may have.

Send To: Rovers North
1319 Vermont Route 128
Westford, VT 05494

or Fax: 802-879-9152

Your Name: _____
Address: _____

Phone #: _____
Email Adrs: _____

Instruction part number (top right corner) or description of what instructions are: _____
Overall, how would you rate the quality of this set of instructions? (please circle one):

Poor		Fair		Good		Very Good		Excellent	
1	2	3	4	5	6	7	8	9	10

Ideas, Comments, or Corrections (please include specifics, such as page number, or step number):

THANK YOU!

1 802 879-0032 or (800) 403-7591 • Fax: (802) 879-9152
email@roversnorth.com • www.roversnorth.com
Rovers North, Inc. • 1319 VT Rt. 128 • Westford, Vermont • 05494-9601 USA